



MX522 PCB Spring Type Terminal Block




DIMENSIONS/POSITIONS

MX522-350

間距	Pitch	3.50mm
位數	Poles	2 ~ 24Poles
塑膠本體	Housing Material	PA 66
端蓋	Cover	PA 66
端子	Contact	Phosphor Bronze, Tin Plated
電線線徑	Wire Size	14 ~ 20AWG
剝線長度	Wire Strip Length	9mm
PCB孔徑	PCB Hole Diameter	1.3mm
環境作業溫度	Operating Temperature	-40°C to +105°C

TECHNICAL DATA

連接符合標準 Connection in acc. with standard EN-VDE	
額定電流 I _n	Nominal Current I _n 2A
額定橫截面	Nominal Cross Section 0.75mm ²
最大負載電流	Maximum load current 2A
絕緣材料	Insulating Material PA
阻燃等級,符合UL94 Inflammability class acc. to UL94	V0
額定電壓,UL/CUL Nominal voltage, UL/CUL	300V
額定電流,UL/CUL Nominal current, UL/CUL	6A

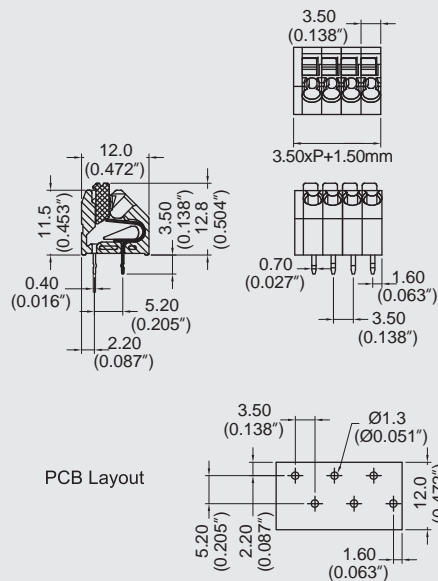

MX